

USB-C to HDMI 2.1 Adapter

SKU: USBC-388-GL



Focus on connecting different devices

USB-C to HDMI 2.1 Adapter



Officially
HDMI 2.1 Certified

Application Scenario


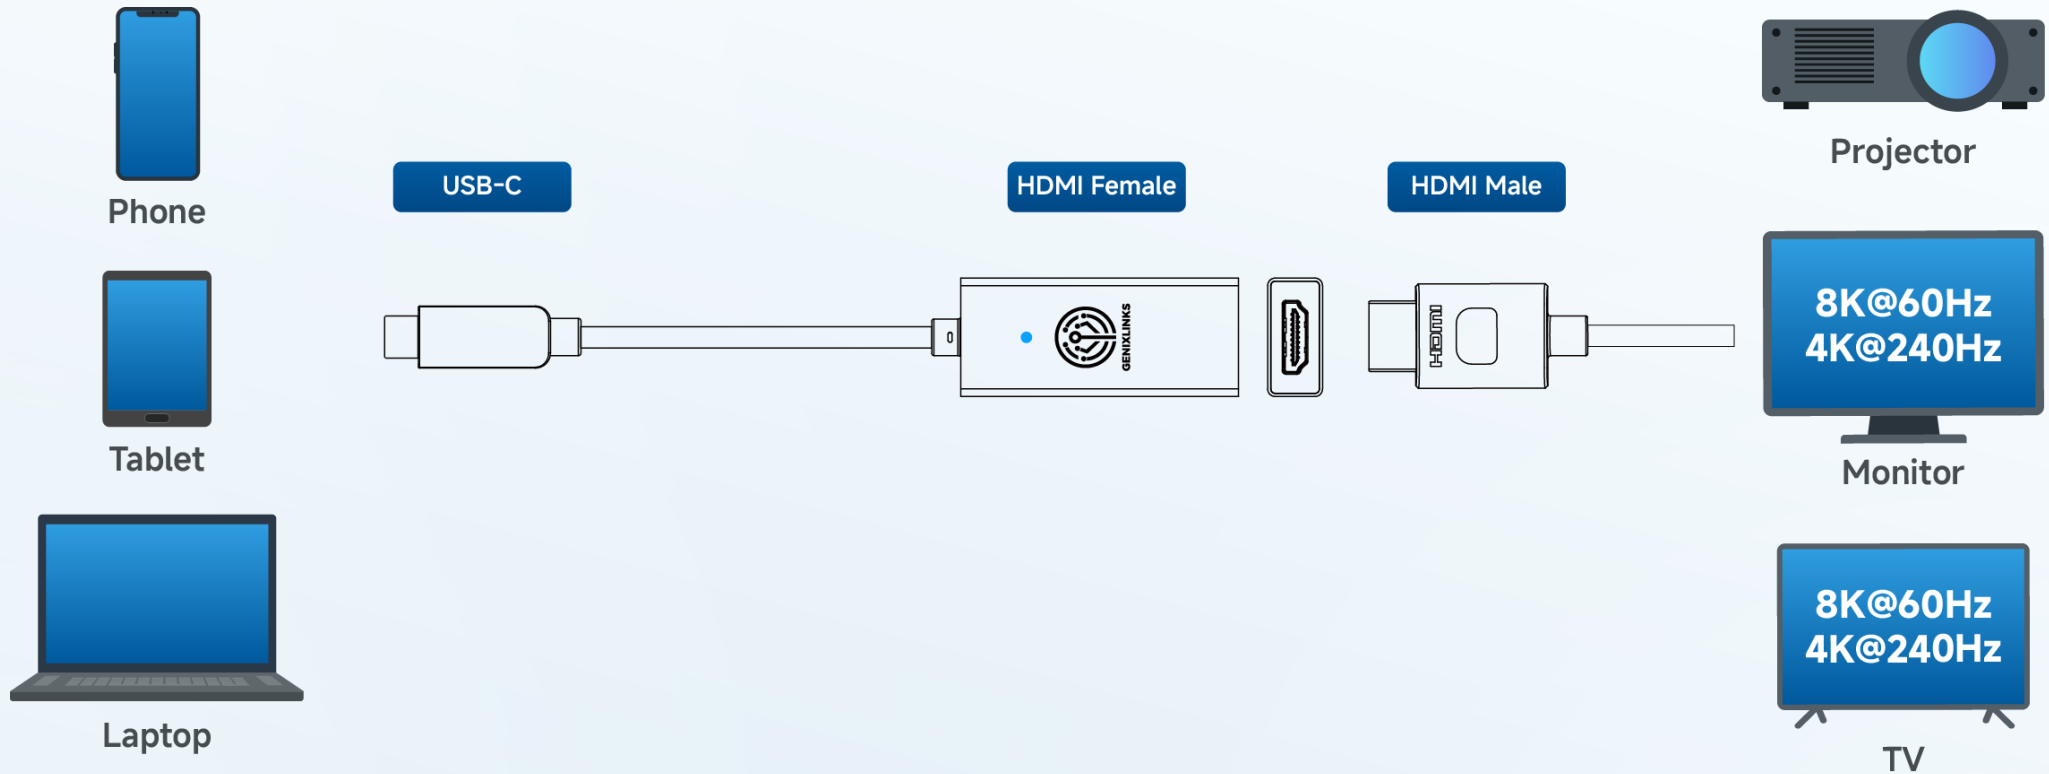


Diagram for USB-C to HDMI Adapter

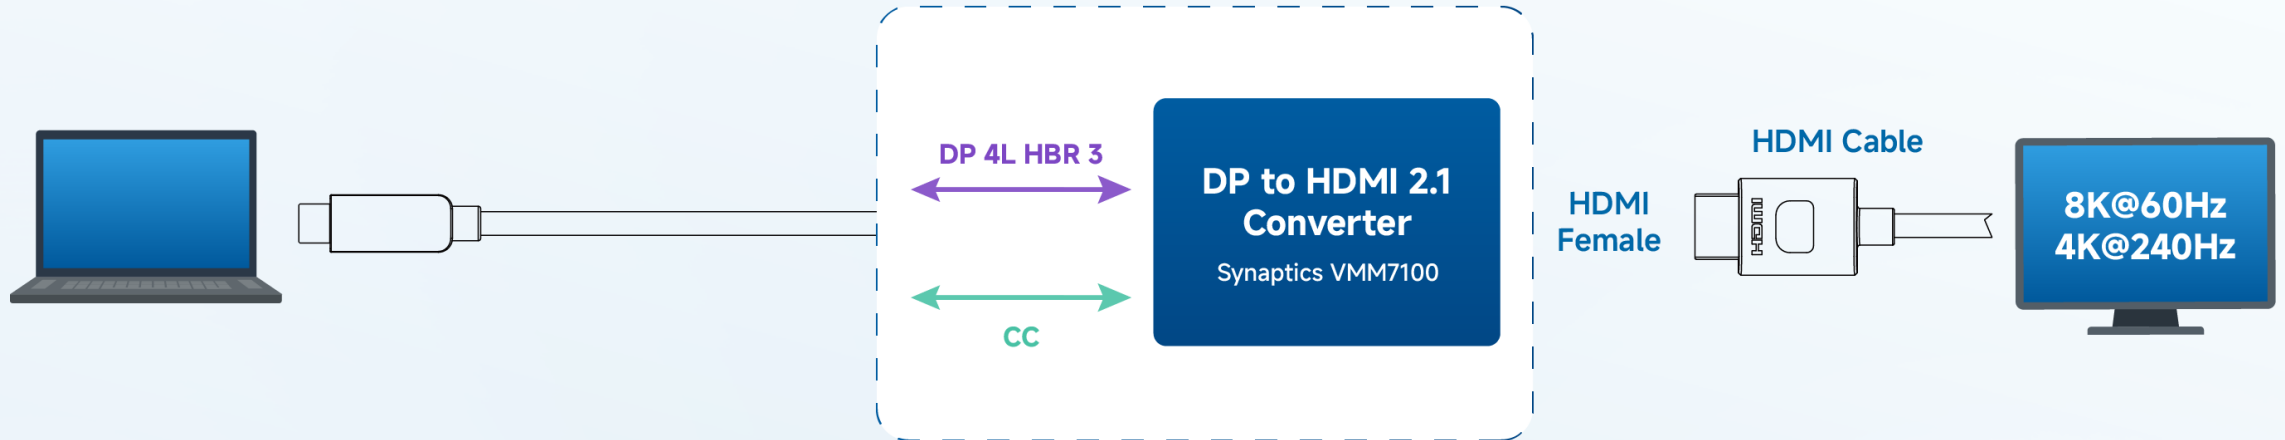

Specification

Connectors	Host Connector	USB-C Male
	Device Connector	HDMI Female
Compatibility	Host Support	USB-C, Thunderbolt 3 / 4 / 5
	OS Support	OS Independent
Performance	HDMI Resolution Support	Up to 8K@60Hz or 4K@240Hz
	HDMI Audio Support	32 Channel LPCM, Compressed Audio
Physical Characteristics	Available Length	5.9 in (150 mm)
	Material	Metal Housing and Braided Cable
	Adapter Housing	0.9 x 2.2 x 0.4 in (23 x 54.8 x 11 mm)
Indicators	LED	1x Blue LED - Power on - > LED on - Power off - > LED off
Certification	FCC/CE/RoHS/HDMI	
Country of Origin	Thailand	

Max Display Resolution – Windows / Chromebooks



Windows / Chromebook Host	Maximum Resolution
USB-C Alternate Mode HBR3 with DSC Enabled	7680 x 4320 @60Hz, 3840 x 2160 @240Hz
USB-C Alternate Mode HBR2/HBR3	3840 x 2160 @60Hz

Max Display Resolution - Mac



MacBook	Maximum Resolution
All MacBooks with standard factory firmware	3840 x 2160 @60Hz
M1/M2 & M1/M2 Pro & M1/M2 Max with special firmware	3840 x 2160 @120Hz
M3/M4 & M3/M4 Pro & M3/M4 Max with special firmware	3840 x 2160 @240Hz

Thanks!